Cab Mountings

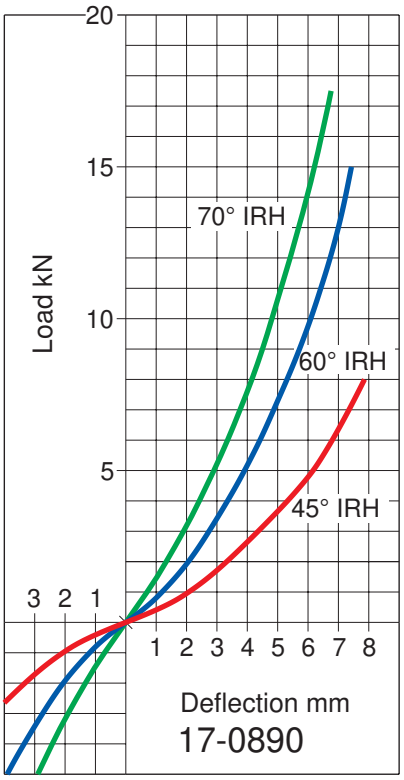

Metalastik® type Cab Mountings

Specially profiled rubber section together with bump and rebound washers provide optimum suspension characteristics for cabs on commercial vehicles, tractors and other off-road vehicles, earthmoving equipment and construction plant.

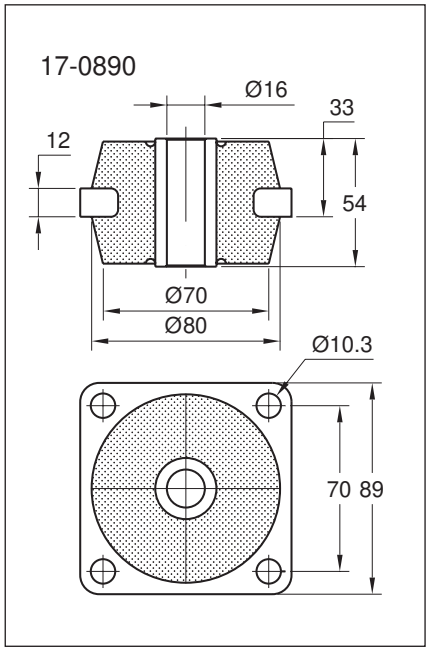

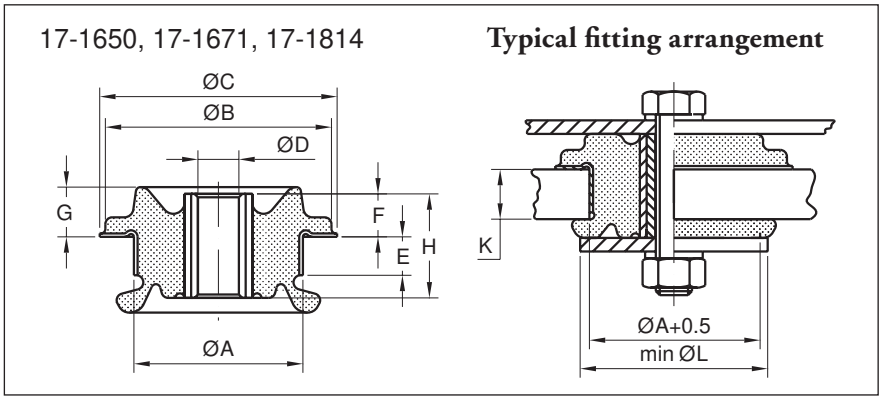

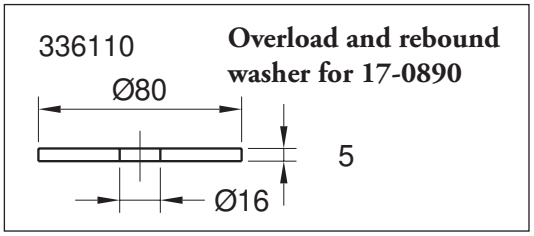

Type	Art.No		Dimensions in mm A	B	C	D	H	F	E	G	K	L	Max load (kg)	Radial stiffness (N/mm)	Weight (kg)
Cab	17-1671-45	(45° IRH)	75	100	105	16.5	46	19	17	22	20	105	160	500	0.45
mountings	17-1761-60	(60° IRH)	75	100	105	16.5	46	19	17	22	20	105	300	1220	0.45
	17-1650-45	(45° IRH)	75	100	105	16.5	46	19	17	22	20	105	300	650	0.46
	17-1650-60	(60° IRH)	75	100	105	16.5	46	19	17	22	20	105	500	1300	0.46
	17-1814-45	(45° IRH)	89	115	120	25	47	13	23	21	25	120	410	700	0.63
	17-1814-60	(60° IRH)	89	115	120	25	47	13	23	21	25	120	760	1400	0.63
	17-0890-45	(45° IRH)											Max static		0.83
	17-0890-60	(60° IRH)					See drawing						deflection		0.83
	17-0890-70	(70° IRH)											5 mm		0.83
Washer	336110														

Trelleborg Industrial AVS operates a policy of continuous improvement and development. We reserve the right to change design an d specification of our products without prior notification or alteration of literature