Equi-frequency Mountings

Features
Each design has substantially the same stiffness in vertical and horizontal directions. Load range 11 kg to 54 kg. Can be used as small anti-shock mounting when static loadings are derated.

Metalastik® type Equi-frequency Mounting
General purpose low profile mounting for use where space is restricted. Suitable for stationary applications. May also be used to protect delicate or sensitive equipment from external shock or disturbances.

Typical applications include:
- Instrument panels
- Small fan sets
- Small vacuum pumps

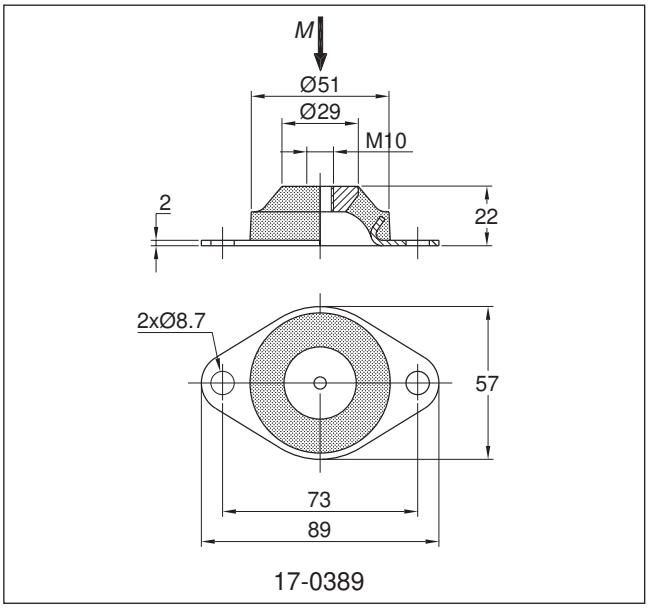

17-0389

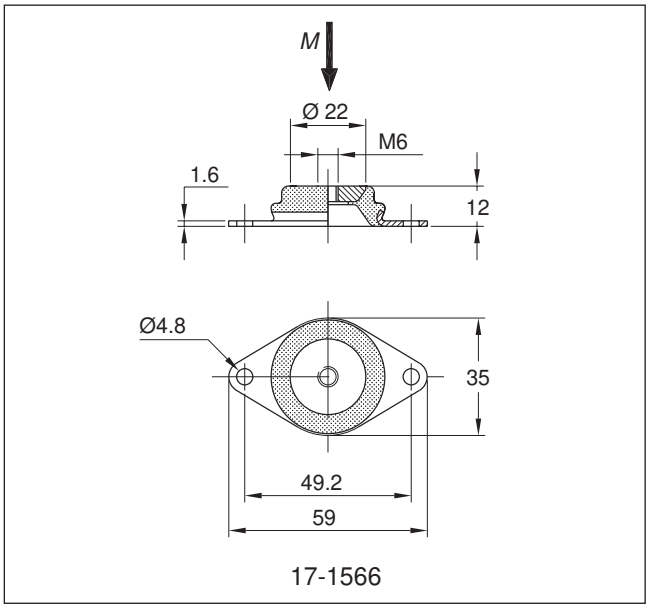

17-1566

Type	Art.No.	*M*-Max (kg)	Weight (kg)
Equi-frequency mountings	17-1566-45 (45° IRH)	11	0.024
	17-1566-60 (60° IRH)	22	0.024
	17-0389-45 (45° IRH)	27	0.10
	17-0389-60 (60° IRH)	54	0.10

Trelleborg Industrial AVS operates a policy of continuous improvement and development. We reserve the right to change design an d specification of our products without prior notification or alteration of literature