Flanged Instrumountings

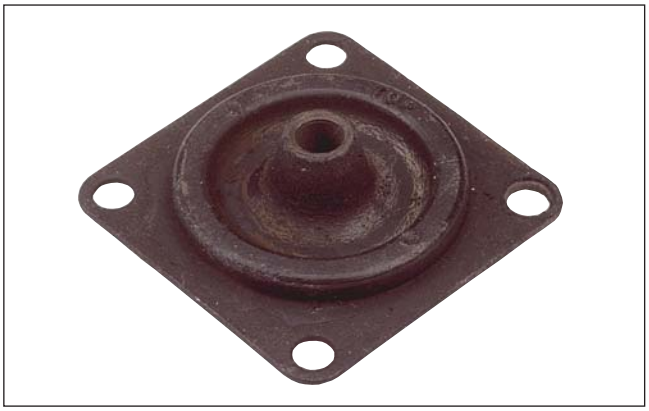

Features

- Fail-safe when fitted with overload and rebound washers of the same diameter as the rubber section.
- Load range from 2.7 to 5.4 kg.
- Static deflection up to 3 mm.
- Easy to fit as part of a cabinet enclosure.
- Can be used in both vertical directions.

Metalastik® type Flanged Instrumountings

These mountings are suitable for both mobile and static applications, for the protection of sensitive equipment from external vibration or for vibration isolation of small fan sets, transformers and similar equipment. Flanged Instrumountings can be fail-safe if fitted with a washer to the top and bottom of the rubber section.

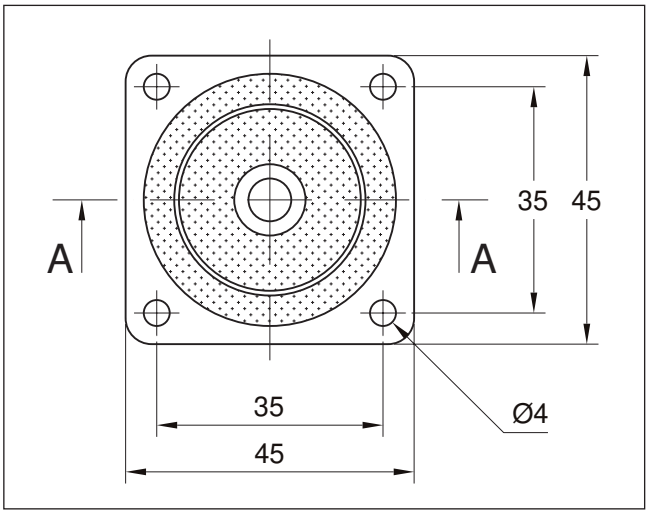

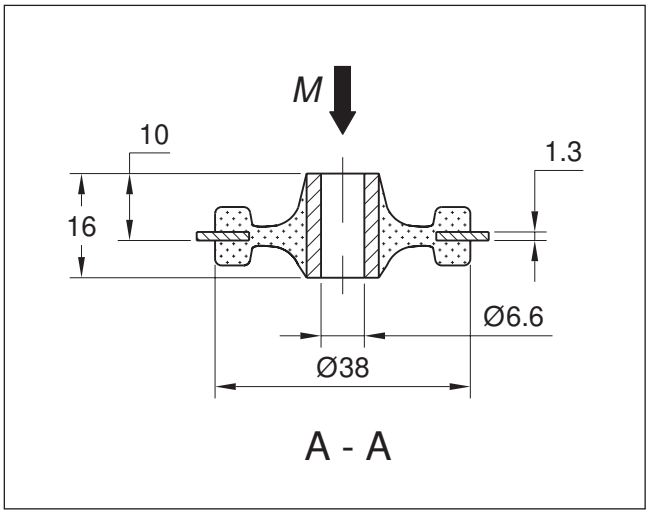

Art.No.	*M*-Max (kg)	Weight (kg)
17-1801-45 (45° IRH)	2.7	0.03
17-1801-60 (60° IRH)	5.4	0.03

Trelleborg Industrial AVS operates a policy of continuous improvement and development. We reserve the right to change design an d specification of our products without prior notification or alteration of literature