# GK

## Novibra® type GK

Mounting type GK is specifically designed for isolation of heavy machinery with low interfering frequencies. It is widely used under concrete foundations supporting heavy machinery.

The long narrow section enables type GK to be suitable for fitting under a common structural frame supporting different equipments.

Typical fields of application are:

- Rolling mills
- Mixers
- Gearboxes
- Industrial fans
- Paper mills
- Converters
- Sound enclosures
- Floating structures

## Features

Type GK is a heavy duty mounting with excellent flexible characteristics in both vertical and lateral planes. Deflection up to 30 mm is possible making type GK suitable for installations with low disturbing frequencies.

Installation is simple, eliminating traditional methods of attachment to machinery or support structure.

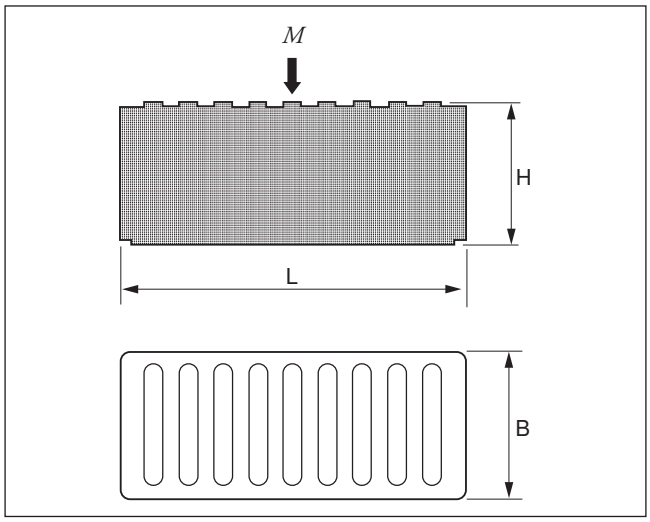


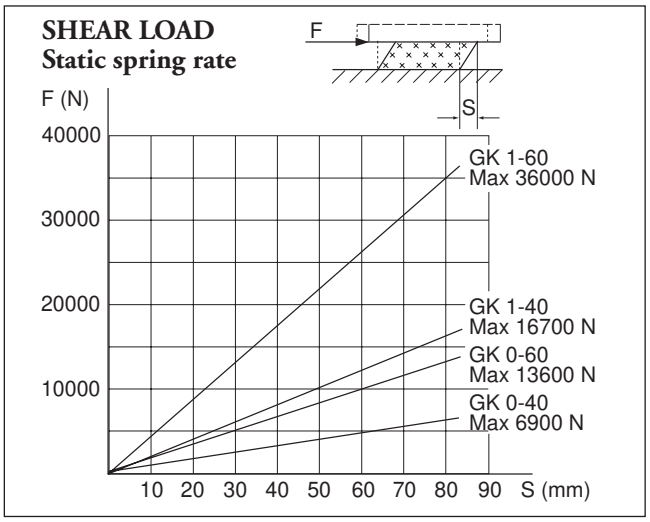


| Type | | Art.No. | Dimensions in mm L | B | H | Weight (kg) | *M*-Max(kg) |
|---|---|---|---|---|---|---|---|
| GK 0-40 | (40° IRH) | 1534080 | 195 | 175 | 150 | 5.2 | 1800 |
| GK 0-60 | (60° IRH) | 1861630 | 195 | 175 | 150 | 5.7 | 3800 |
| GK 1-40 | (40° IRH) | 67959 | 400 | 175 | 150 | 10.7 | 4000 |
| GK 1-60 | (60° IRH) | 67967 | 400 | 175 | 150 | 11.8 | 8000 |



*Trelleborg Industrial AVS operates a policy of continuous improvement and development. We reserve the right to change design an d specification of our products without prior notification or alteration of literature*