# Silever Series

- Rustproff housings made with a special alloy
- Bearings are high carbon chromium bearing steel

## UFL000 type*

TWO-BOLT FLANGE UNITS
With Eccentric Collar Locking

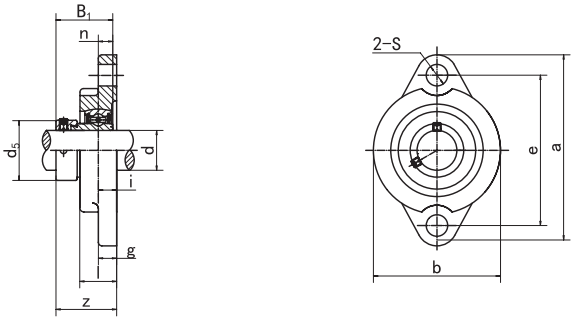


UFL000

## KFL000 type*

TWO-BOLT FLANGE UNITS
With Set Screw Locking




KFL000

| Unit NO. | Dimensions ( mm / in. ) | | | | | | | | | | | | Bolt Size mm/in. | Bearing No. | Housing No. | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | d | a | e | i | g | l | S | b | Z | $B_1$ | n | $d_5$ | | | | |
| UFL000 | 10 | 60.0<br>2-23/64 | 45.0<br>1-25/35 | 5.5<br>7/32 | 5.5<br>7/32 | 11.5<br>29/64 | 7.0<br>9/32 | 36.0<br>1-27/64 | 15.5<br>39/64 | 17.5<br>0.689 | 4.0<br>0.157 | 17.0<br>43/64 | M6 | U000 | FL000 | 0.06 |
| UFL001 | 12 | 63.0<br>2-31/64 | 48.0<br>1-57/64 | 5.5<br>7/32 | 5.5<br>7/32 | 11.5<br>29/64 | 7.0<br>9/32 | 38.0<br>1-1/2 | 16.0<br>5/8 | 17.5<br>0.689 | 4.0<br>0.157 | 19.0<br>3/4 | | U001 | FL001 | 0.07 |
| UFL002 | 15 | 67.0<br>2-41/64 | 53.0<br>2-3/32 | 6.5<br>1/4 | 6.5<br>1/4 | 13.0<br>33/64 | 7.0<br>9/32 | 42.0<br>1-21/32 | 18.6<br>47/64 | 18.5<br>0.728 | 4.5<br>0.177 | 22.0<br>55/64 | | U002 | FL002 | 0.10 |
| UFL003 | 17 | 71.0<br>2-51/64 | 56.0<br>2-13/64 | 7.0<br>9/32 | 7.0<br>9/32 | 14.0<br>35/64 | 7.0<br>9/32 | 46.0<br>1-13/16 | 19.5<br>49/64 | 20.5<br>0.807 | 5.0<br>0.197 | 25.0<br>31/32 | M6 | U003 | FL003 | 0.13 |
| UFL004 | 20 | 90.0<br>3-35/64 | 71.0<br>2-51/64 | 8.0<br>5/16 | 8.0<br>5/16 | 16.0<br>5/8 | 10.0<br>25/64 | 55.0<br>2-11/64 | 23.0<br>29/32 | 24.5<br>0.965 | 6.0<br>0.236 | 30.0<br>1-3/16 | M8 | U004 | FL04-5 | 0.20 |
| UFL005 | 25 | 95.0<br>3-47/64 | 75.0<br>2-61/64 | 8.0<br>5/16 | 8.0<br>5/16 | 16.0<br>5/8 | 10.0<br>25/64 | 60.0<br>2-3/8 | 24.5<br>31/32 | 25.5<br>1.000 | 6.5<br>0.256 | 36.0<br>1-27/64 | M8 | U005 | FL05-6 | 0.25 |
| UFL006 | 30 | 112.0<br>4-13/32 | 85.0<br>3-11/32 | 9.0<br>23/64 | 9.0<br>23/64 | 18.0<br>23/32 | 13.0<br>33/64 | 70.0<br>2-3/4 | 27.0<br>1-1/6 | 26.5<br>1.040 | 6.5<br>0.256 | 42.0<br>1-21/32 | M10 | U006 | FL06-7 | 0.35 |
| UFL007 | 35 | 122.0<br>4-51/64 | 95.0<br>3-3/4 | 10.0<br>25/64 | 10.0<br>25/64 | 20.0<br>25/32 | 13.0<br>33/64 | 80.0<br>3-5/32 | 32.5<br>1-9/32 | 29.5<br>1.161 | 7.0<br>0.276 | 48.0<br>1-57/64 | M10 | U007 | FL07-8 | 0.50 |

| Unit NO. | Dimensions ( mm / in. ) | | | | | | | | | | | Bolt Size mm/in. | Bearing No. | Housing No. | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | d | a | e | i | g | l | S | b | Z | B | n | | | | |
| KFL000 | 10 | 60.0<br>2-23/64 | 45.0<br>1-25/35 | 5.5<br>7/32 | 5.5<br>7/32 | 11.5<br>29/64 | 7.0<br>9/32 | 36.0<br>1-27/64 | 15.5<br>39/64 | 14.0<br>0.551 | 4.0<br>0.157 | | M6 | K000 | FL000 | 0.06 |
| KFL001 | 12 | 63.0<br>2-31/64 | 48.0<br>1-57/64 | 5.5<br>7/32 | 5.5<br>7/32 | 11.5<br>29/64 | 7.0<br>9/32 | 38.0<br>1-1/2 | 16.0<br>5/8 | 14.5<br>0.571 | 4.0<br>0.157 | | | K001 | FL001 | 0.07 |
| KFL002 | 15 | 67.0<br>2-41/64 | 53.0<br>2-3/32 | 6.5<br>1/4 | 6.5<br>1/4 | 13.0<br>33/64 | 7.0<br>9/32 | 42.0<br>1-21/32 | 18.6<br>47/64 | 16.5<br>0.650 | 4.5<br>0.177 | | | K002 | FL002 | 0.10 |
| KFL003 | 17 | 71.0<br>2-51/64 | 56.0<br>2-13/64 | 7.0<br>9/32 | 7.0<br>9/32 | 14.0<br>35/64 | 7.0<br>9/32 | 46.0<br>1-13/16 | 19.5<br>49/64 | 17.5<br>0.689 | 5.0<br>0.197 | | M6 | K003 | FL003 | 0.13 |
| KFL004 | 20 | 90.0<br>3-35/64 | 71.0<br>2-51/64 | 8.0<br>5/16 | 8.0<br>5/16 | 16.0<br>5/8 | 10.0<br>25/64 | 55.0<br>2-11/64 | 23.0<br>29/32 | 21.0<br>0.827 | 6.0<br>0.236 | | M8 | K004 | FL04-5 | 0.20 |
| KFL005 | 25 | 95.0<br>3-47/64 | 75.0<br>2-61/64 | 8.0<br>5/16 | 8.0<br>5/16 | 16.0<br>5/8 | 10.0<br>25/64 | 60.0<br>2-3/8 | 24.5<br>31/32 | 22.5<br>0.886 | 6.5<br>0.256 | | M8 | K005 | FL05-6 | 0.25 |
| KFL006 | 30 | 112.0<br>4-13/32 | 85.0<br>3-11/32 | 9.0<br>23/64 | 9.0<br>23/64 | 18.0<br>23/32 | 13.0<br>33/64 | 70.0<br>2-3/4 | 27.0<br>1-1/6 | 24.5<br>0.965 | 6.5<br>0.256 | | M10 | K006 | FL06-7 | 0.35 |

*ALSO AVAILABLE WITH STAINLESS STEEL INSERT AND HOUSING